


Q20

Counterbalanced Forklift

Bridge the last "100 meters" of smart intralogistics transportation



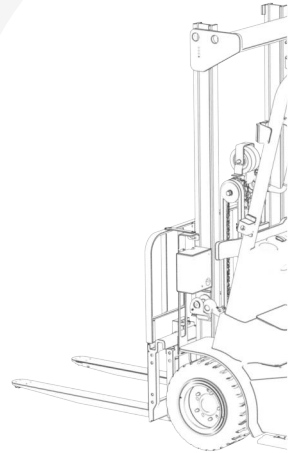

Introduction

Bridging the last "100 meters" of intelligent intralogistics transportation, the Q20 counterbalanced AGV forklift, a customized machine for automated loading and unloading, is compatible with various types of pallets such as Open Pallet, Closed Pallet, and POD pallets. It has a maximum load capacity of 4079 lbs, a lifting height of 4.92 ft, and the forks support horizontal movement and pitch motion. It is suitable for various scenarios such as floor-to-floor handling, heavy-load stacking, and automated loading and unloading of different trucks (Wing type, flatbed, trailer etc.). It is an ideal choice for automation and digital upgrades in warehousing logistics, production intralogistics, loading and unloading logistics.

Features



Environment Adaptive

With laser navigation and positioning, there's no need to renovate the on-site environment.



Highly Intelligent

A whole range of functions such as mapping, path planning, auto-charging, and intelligent operations for various scenarios.



Non-stop Pallet Pose Identification

Visual perception non-stop pallet pose identification can realize fast and accurate pick-and-place of goods.



Intelligent Safety

Comprehensive fault self-detection
360° obstacle avoidance and sound & light warning.

Autonomous Loading & Unloading Scenarios

Wing Type Truck Loading and Unloading Solutions


Based on the structural characteristics of the open compartment of the wing type truck, using unmanned forklift trucks to load and unload.



Support different height of wing type truck



Support mixed (un)loading



Dimensions measurement and space allocation



Maximum space utilization with 0 clearance

Flatbed Truck Loading and Unloading Solutions

Automated loading and unloading of flatbed trucks using unmanned forklifts as the carrier for top-open vehicles such as flatbed and high-bay trucks.



Support different height of flatbed truck



Support mixed (un)loading



Dimensions measurement and space allocation




Maximum space utilization with 0 clearance

Trailer Truck Loading and Unloading Solutions

With unmanned forklift truck as the carrier, the innovative 3D lidar simultaneous localization and mapping (SLAM) and flexible vision technology are used to automate the trailer loading and unloading, suitable for pallet or pallet-free situation, as well as stacking goods in the truck.




Max deck slope at 8°



Dimensions measurement and space allocation



Access to last set of cargos



Maximum space utilization with 0 clearance


Q20 Counterbalanced Forklift



Specifications


	Model	Q20
	Navigation	Laser/ Sky Navigation/ Mixed Navigation
Basic Parameter	Communication	Wi-Fi/ 5G/ Optical Communication
	Driving Features	Forward, Reverse, and Turn
	Control Mode	Auto/Manual
	Rated Load	1850 kg(4079 lbs)
	Load Center	500 mm(1.64 ft)
	Weight (Including battery)	3700 kg(8157 lbs)
	Turning Radius Wa	1828mm(6 ft)
	Aisle Width	4100mm(13.45 ft)
	Maximum Lifting Height	1500mm(4.92 ft)
	Dimensions L×W×H	3262x1259x2180 mm(10.7x4.13x7.15 ft)
	Fork Dimensions l×exs	1070x100x40 mm(3.51x0.33x0.13 ft)
	Fork Outer Space	360~900 mm(1.18~2.95 ft)
	Minimum Height of Fork From the Ground	45±5 mm(0.14±0.02 ft)
Movement Specifications	Positioning precision/ Stop Angle (Center of bearing wheel)	±20 mm(0.06 ft)
	Obstacle Clearing Capability	≤30 mm (0.1 ft)
	Climbing Capacity	Full Load≤7° (13%) /No Load≤8° (15%) ≤30
	Cross-Groove Capability	≤30 mm(0.1 ft)
	Max Driving Speed	2.5 m/s(5.59 mph)
	Max Lifting Speed	250 mm/s(0.56 mph)
	Max Descent Speed	300 mm/s(0.67 mph)
Battery Specifications	Battery Voltage/Capacity (V/Ah)	48V450Ah
	Charging Mode	Auto/Manual
	Run time	8~10h
	Battery Life	Complete charge-discharge 2500 times ≥70%
Functions of the Forks	Goods Detection	Standard
	Inclination Detection (Pitch)	±8°
	Side/Traverse Positioning	±200mm
	Automatic Fork Distance Adjustment	Optional
	Overload Alarm (±5%)	Optional

Note: In the real-time update of product parameters, the above parameters are for reference only and shall prevail.

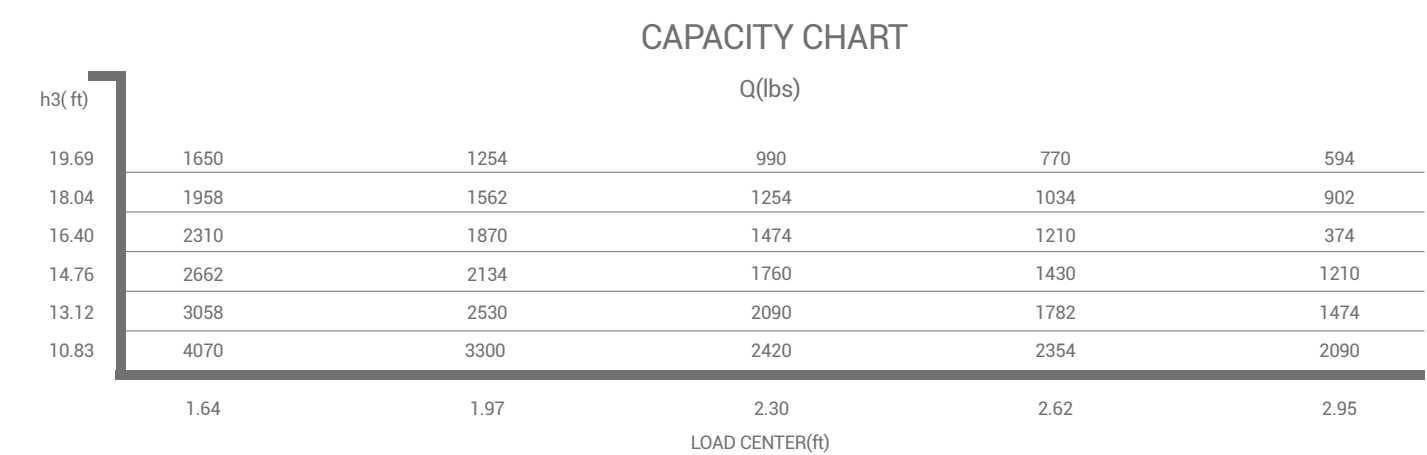



Comprehensive safety protection:

Sound perception + obstacle avoidance + touch reception, 360° omnidirectional three-layer protection

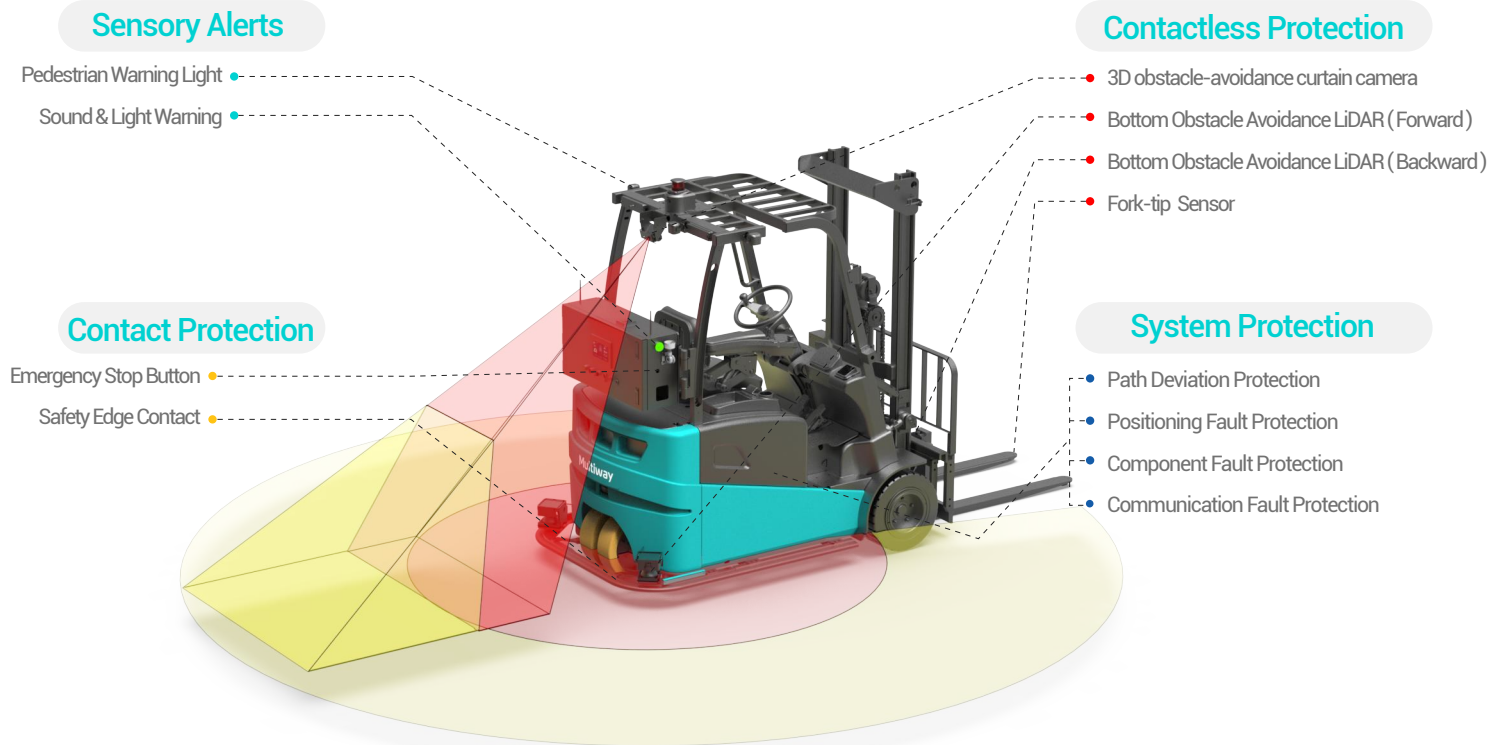

Point Cloud Obstacle Avoidance:

The forward simulation algorithm can measure the distance to obstacles, autonomously plan the moving speed, ensure the vehicle accelerates and decelerates smoothly without sudden changes in speed.

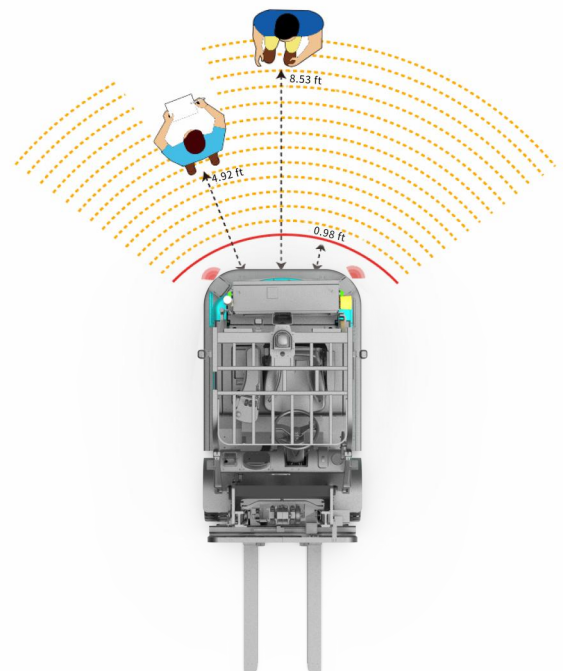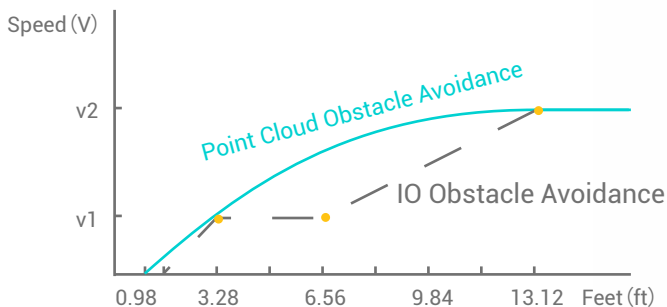

Multiway Robotics

Multiway Robotics, a leading intelligent intralogistics solution provider, with the mission of "Establish a new and efficient employment mode", is dedicated to drive continuous upgrades in social productive forces.

Global headquarter and laboratory are located in Shenzhen, China, with production facilities in Hefei. Multiway has also established sub subsidiaries in the United States, Germany, Japan, South Korea, and more, extending business, operations, and services to 30+ countries and regions worldwide. Focusing on advanced robotics and AI technology, Multiway Robotics is committed to delivering cutting-edge intelligent manufacturing and smart logistics solutions to our customers. Multiway offers a comprehensive, integrated innovation delivery platform and solutions, ranging from core sensors and algorithms to self-developed unmanned forklifts and upper-level control systems. Hardware products include a full range of unmanned forklifts and four-way shuttle, while software systems encompass Multiway Cloud, WMS, RCS, WCS, on-site management systems, and various visual solutions.

After successfully delivering numerous benchmark projects in industries such as factories, warehousing, and logistics, Multiway has become a trusted and ongoing collaborative partner for many industry-leading customers.



Contact Us

Offices:

USA · Atlanta | Japan · Tokyo | Korea · Seoul
Germany · North Rhine-Westphalia
China · Shenzhen

Hotline: + 86 133 9286 4873

Official website: www.mw-r.com

Email: sales@mw-robot.com

Subscribe to get the latest Multiway Robotics news

