
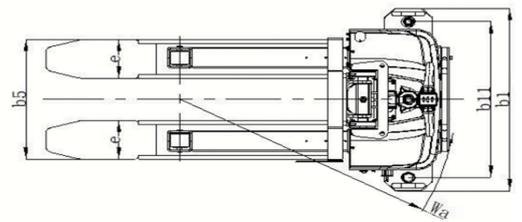


ELECTRIC SELF-LIFT STACKER SES10-SF

Feature		
Model		SES10/12/15-SF
Drive Method		Electric
Operate type		Walkie
Load capacity	Q(kg)	1000/1200/1500
Load centre distance	c (mm)	400
Wheels		
Wheel type		PU
Drive wheel	Φ (mm)	$\Phi 190 \times 70$
Front wheel	Φ (mm)	$\Phi 80 \times 70$
Rear wheel distance	b1(mm)	780
Wheel base	y(mm)	980
Dimensions		
Lift height	h3 (mm)	900/1100/1300/1500/1600
Height when mast lowered	h1(mm)	1250/1450/1650/1850/2000
Maximum height of the whole vehicle during the operation	h4 (mm)	2080/2480/2880/3280/3580
Lowered height	h13 (mm)	85
Overall length	l1 (mm)	1730
Overall width	b1(mm)	920
Dimension of forks	s/e/l (mm)	70/195/1220
Overall width of forks	b5 (mm)	560/600
Minimum ground clearance	m2 (mm)	10
Turning radius	Wa(mm)	1180
Height of handle from ground	h (mm)	1250
Performance		
Climbing capability, laden	%	3
Driving brake		Electromagnetic
Drive motor power	(kW)	0.75
Lift motor power	(kW)	2.2
Battery voltage/capacity	(V/Ah)	48/25/30AH
Steering mode		Mechanical steering
Weight		
Net weight	kg	400
Battery weight	kg	30

TECHNICAL SPECIFICATION

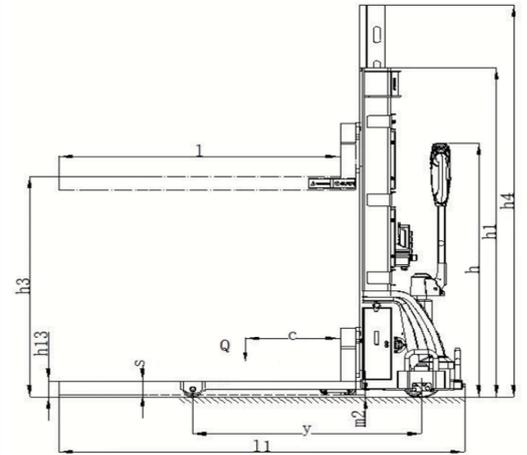

Functional Handle



Remote Control



Side-way Li-battery



Robust Chassis